

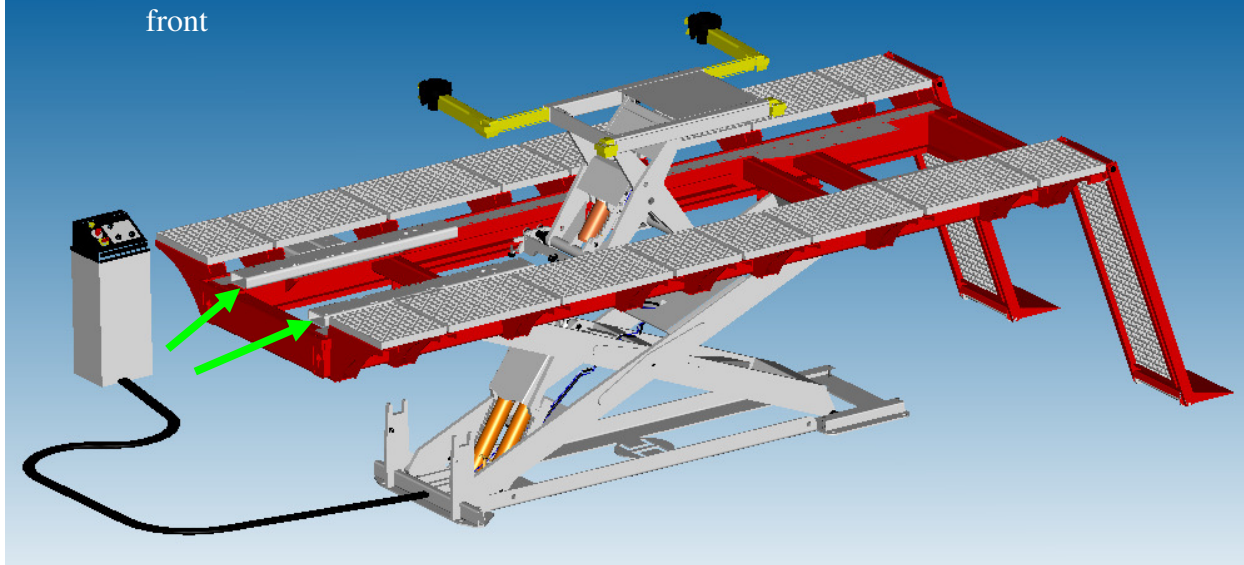


GR04F.3822.3 GRIFFON EVOLUTION DOUBLE ENTRY

Crossmembers on the front

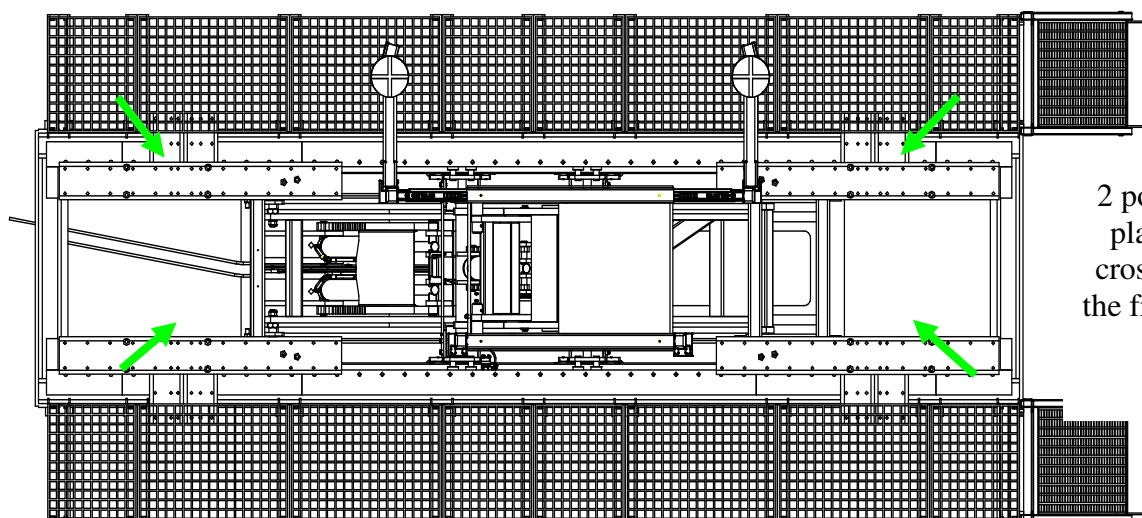

Crossmembers on the rear

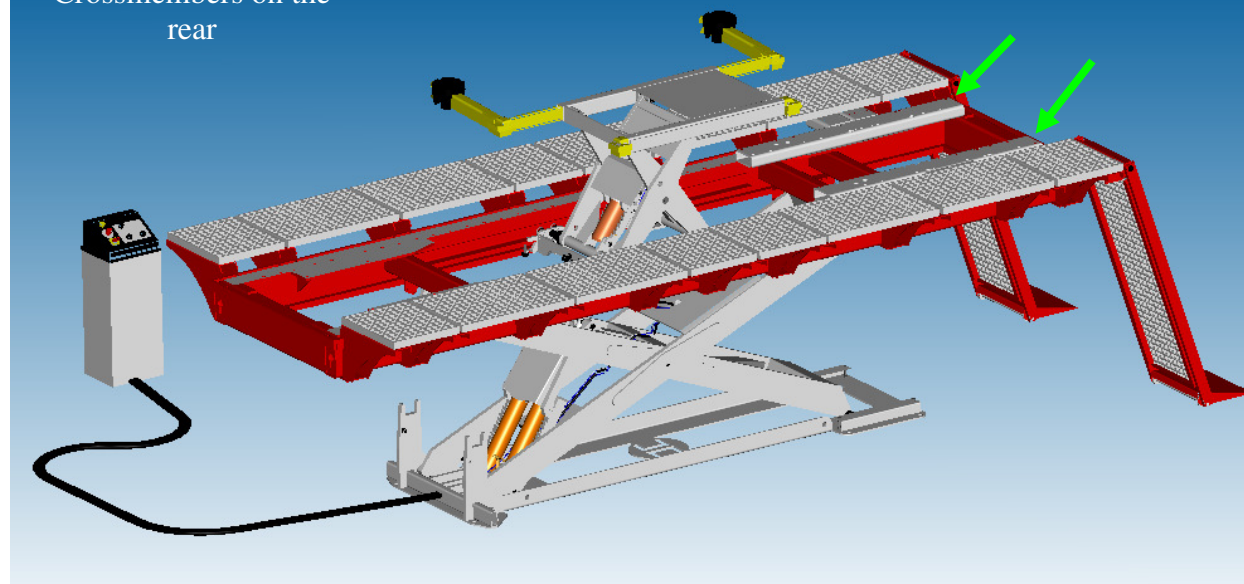

2 possibilities to place the front crossmembers at the front OR at the rear

GRIFFON 2800 EVOLUTION « DOUBLE ENTRY »

This Griffon Evolution is having a so call double drilling allowing to place the 2 front crossmembers on both side of the bench frame.

In this case the work space is reduced between the bench & the wall to 1.5 meter on the length orientation of the bench.

Also in case of side damage on the vehicle, the damage vehicle can be oriented on the bench in order that the damage area will be on the side of the working area to reduce the width distance between the wall and the bench to 1.5 meters

